

+

# UTILITY PATENT APPLICATION TRANSMITTAL

Use for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No. 35.G2067 Div. 1

First Named Inventor or Application Identifier

RIE SUZUKI

Express Mail Label No.

Commissioner for Patent  
Box Patent Application  
Washington, DC 20231

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification *Total Pages* 27

3. ☒ Drawing(s) (35 USC 113) *Total Sheets* 12

4. ☒ Patent Application Bibliographic  
Data Sheet *Total Sheets* 1

5. ☒ Oath or Declaration *Total Pages* 2

a. ☐ Newly executed (original or copy)

b. ☐ Unexecuted for information purposes

c. ☒ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)  
[Note Box 6 below]

d. ☐ DELETION OF INVENTOR(S)

Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).

6. ☒ Incorporation By Reference (useable if Box 5c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 5c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein. The incorporation can only be  
relied upon when a portion has been inadvertently omitted from the  
submitted application parts.

7. ☐ Microfiche Computer Program (Appendix)

8. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

11. ☐ English Translation Document (if applicable)

12. ☒ Information Disclosure  
Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations

13. ☒ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

15. ☐ Small Entity ☐ Statement filed in prior application  
Statement(s) Status still proper and desired

16. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

17. ☐ Other: \_\_\_\_\_

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08/974,964  
Prior application information: Examiner A. Baokye Group/Art Unit: 2733

## 19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 05514 or ☐ Correspondence address below  
(Insert Customer No. or Attach bar code label here)

NAME

Address

City

Country

State

Telephone

Zip Code

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	38-20 =	18	X \$ 18.00 =	\$324.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	6-3 =	3	X \$ 78.00 =	\$234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$690.00
				Total of above Calculations =	\$1,248.00
				Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).	
				TOTAL =	\$1,248.00

## 20. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

21. ☒ A check in the amount of \$ 1,248.00 to cover the filing fee is enclosed.

22. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

23. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	L. P. Diana Reg. No. 29,296
SIGNATURE	<i>[Signature]</i> 29,296
DATE	September 12, 2000

[illegible]

CORRESPONDENCE INFORMATION

APPLICATION INFORMATION

Total Drawing Sheets:: 12  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: 35.G2067D  
Secrecy Order in Parent Appl.?: No

## REPRESENTATIVE INFORMATION

Representative Customer Number:: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 322713/1996  
Filing Date:: 12-03-96  
Country:: Japan  
Priority Claimed:: Yes

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: )  
 : Examiner: A. Boakye  
 RIE SUZUKI )  
 : Group Art Unit: 2733  
 Application No.: NYA )  
 Division of S.N. 08/974,964 )  
 filed November 20, 1997 )  
 :  
 Filed: Concurrently Herewith )  
 :  
 For: SPREAD-SPECTRUM )  
 COMMUNICATION METHOD AND :  
 APPARATUS ) September 12, 2000

Commissioner for Patents  
 BOX PATENT APPLICATION  
 Washington, D.C. 20231

PRELIMINARY AMENDMENT  
 AND  
INFORMATION DISCLOSURE STATEMENT

Sir:

Prior to calculation of the filing fee, please amend  
 the above-identified application as follows:

IN THE SPECIFICATION

At page 1, immediately after the title, insert

--This application is a division of Application No.

08/974,964, filed on November 20, 1997.--

002150-2513350

IN THE CLAIMS:

Please amend Claims 1, 8, 11, and 21 as follows:

1. (Amended) A spread spectrum communication method comprising the steps of:

dividing a communication period for a spread spectrum [data] signal into a plurality of data-communication periods; and

providing an adjustment period [for receiving the spread spectrum data] between one data-communication period and another data-communication period, such that the spread spectrum signal is continuously communicated by communicating an adjustment signal for adjusting reception of the spread spectrum signal during the adjustment period.

8. (Amended) A spread spectrum communication method according to Claim 7, further comprising the step of communicating the adjustment signal not multiplexed by code division multiplexing, in the adjustment period.

11. (Amended) A spread spectrum communication apparatus comprising:

[data] communication means for communicating a spread spectrum [data in] signal divided into a plurality of [divided] data-communication periods; and

adjustment-signal communication means for continuously communicating an adjustment signal for adjusting reception of the spread spectrum [data] signal between one data-communication period and another communication period, such that the spread spectrum signal is continuously communicated.

21. (Amended) A spread spectrum [communication] transmission method comprising the steps of:

dividing data into a plurality of groups of data;

transmitting the groups of data one after another to a receiving end on a spread spectrum signal; and

transmitting, between each two successive groups of data, information to be used by the receiving end in processing an immediately-following one of the groups of data, such that the spread spectrum signal is continuously transmitted.

Please add Claims 22-38 as follows:

--22. A spread spectrum transmission method according to Claim 21, wherein information for synchronizing a spread code is transmitted in said information transmitting step.

23. A spread spectrum transmission method according

to Claim 21, wherein information for adjusting gain is transmitted in said information transmitting step.

24. A spread spectrum transmission method according to Claim 21, wherein the groups of data are transmitted by code division multiplexing and the information is transmitted without code division multiplexing.

25. A spread spectrum transmission method according to Claim 21, further comprising the step of transmitting first information prior to the groups of data, wherein a transmission period of the first information is longer than that of the information transmitted between each two successive groups of data.

26. A spread spectrum communication apparatus comprising:

data transmission means for transmitting a plurality of sets of data on a spread spectrum signal;

information transmission means for transmitting, between each two successive sets of data, information to be used by a receiving end in processing an immediately-following one of the sets of data, such that the spread spectrum signal is continuously transmitted.

27. A spread spectrum communication apparatus according to Claim 26, wherein said information transmission means transmits information for synchronizing a spread code.

28. A spread spectrum communication apparatus according to Claim 26, wherein said information transmission means transmits information for adjusting gain.

29. A spread spectrum communication apparatus according to Claim 26, wherein said data transmission means transmits the groups of data by code division multiplexing, and said information transmission means transmits information which is not multiplexed by code division multiplexing.

30. A spread spectrum communication apparatus according to Claim 26, wherein said information transmission means transmits first information prior to the sets of data, wherein a transmission period of the first information is longer than that of the information between each two successive sets of data.

31. A spread spectrum transmission method comprising the step of transmitting a continuous spread spectrum signal including a plurality of data-communication periods,



wherein an adjustment signal for adjusting synchronization is further transmitted, in the continuous spread spectrum signal, between one of the plurality of data-communication periods and another one of the plurality of data-communication periods.

32. A spread spectrum transmission method according to Claim 31, wherein a signal for adjusting gain is communicated between said one of the plurality of data-communication periods and said another one of the plurality of data-communication periods.

33. A spread spectrum transmission method according to Claim 31, wherein a first adjustment signal is transmitted prior to the plurality of data-communicating periods, wherein the first adjustment signal is longer than the synchronizing adjustment signal transmitted between said one data-communication period and said another data-communication period.

34. A spread spectrum transmission method according to Claim 31, wherein a code-division multiplexed signal is transmitted in the plurality of data-communication periods, and the adjustment signal is not multiplexed by code division multiplexing.

35. A spread spectrum transmission apparatus comprising transmission means for transmitting a continuous spread spectrum signal including a plurality of data-communication periods, wherein said transmission means further transmits an adjustment signal for adjusting synchronization, in the continuous spread spectrum signal, between one of the plurality of data-communication periods and another one of the plurality of data-communication periods.

36. A spread spectrum transmission apparatus according to Claim 35, wherein said transmission means transmits a signal for adjusting gain between said one of the plurality of data-communication periods and said another one of the plurality of data-communication periods.

37. A spread spectrum transmission apparatus according to Claim 35, wherein said transmission means transmits a first adjustment signal prior to the plurality of data-communicating periods, wherein the first signal is longer than the signal transmitted between said one data-communication period and said another data-communication periods.

38. A spread spectrum transmission apparatus according to Claim 35, wherein said transmission means transmits

a code-division multiplexed signal in-the plurality of data-communication periods; and the adjustment signal is not multiplexed by code division multiplexing.--

#### REMARKS

The present application is a division of copending parent Application No. 08/974,964, filed on September 20, 1997. Claims 1-38 are pending in this application, with Claims 1, 8, 11, and 21 having been amended, and Claims 22-38 having been added by the present Amendment. Claims 31-38 correspond to Claims 51-58 from the parent Application No. 08/974,964. Claims 1, 11, 21, 26, 31, and 35 are in independent form.

Favorable consideration and early passage to issue of the present divisional application are respectfully requested.

#### INFORMATION DISCLOSURE STATEMENT

Pursuant to 37 C.F.R. § 1.56, Applicant respectfully directs the Examiner's attention to the documents listed on the enclosed Form PTO-1449.

The information listed on the enclosed Form PTO-1449 was cited in the parent Application No. 08/974,964, and might be deemed pertinent for the reasons given there. The Examiner is respectfully directed to the U.S. Patent and Trademark Office

files for review of those documents. See 37 C.F.R. § 1.98(d) and MPEP § 609. Additionally, the Examiner is requested to indicate that this information has been considered by initialing the appropriate portion of the enclosed Form PTO-1449.

CONCLUSION

Applicant's undersigned attorney may be reached in our New York office by telephone at (212) 218-2100. All correspondence should continue to be directed to our below listed address.

Respectfully submitted,

*me P. Diana*  
Attorney for Applicant

Registration No. 29, 296  
29, 296

FITZPATRICK, CELLA, HARPER & SCINTO  
30 Rockefeller Plaza  
New York, New York 10112-3801  
Facsimile: (212) 218-2200

NY\_MAIN 109901 v 1

TITLE OF THE INVENTION

SPREAD-SPECTRUM COMMUNICATION METHOD AND APPARATUS

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a spread-spectrum communication method and apparatus.

10

Description of the Related Art

In a time-sharing communication method for converting data to bursts, in order to receive and demodulate data bursts it is necessary to establish synchronization with the data bursts to be received. It is also necessary that only desired information addressed to the receiving end be detected and extracted from the received signals. In addition, conflict between one station and another station must be avoided. Accordingly, in general, in such a communication method data is transmitted in accordance with a regular format.

20

Fig. 1 shows an example of a format for a data burst in the above communication method. For example, data bursts each include a preamble consisting of a synchronization code (SY), a unique word (UW) and a station-identification code (ID), and data (DA). Between the data bursts there is a

25

guard time (GT).

A receiving end which receives the data bursts uses the synchronization code in the preamble period to perform reproduction of a carrier, input of automatic gain control (AGC), establishment of clock synchronization, and so forth. The receiving end further detects the unique word (UW) and the station-identification code (ID), and when it perceives that the successive data (DA) is desired data addressed to itself, it holds a reproduced carrier, AGC, clock synchronization and so forth until the data terminates, and it demodulates the data.

However, this communication method causes an error in the reference clock frequency between the transmitting and receiving ends. Thus, with the lapse of time, the receiving end's clock which has held the established synchronization in the preamble, also has increased synchronization errors with respect to the transmitting end's clock. In addition, for example, if the transmission line is wireless, communication quality may vary with time, which results in the possibility of the input AGC held in the preamble losing its optimum condition with the lapse of time. According to this communication method, the maximum time during which data can be transmitted with one data burst is limited by the time during which synchronization precision, AGC precision and so forth can be maintained.

According to the above communication method, when a large amount of digital data (e.g., image data or the like) adapted for recent multimedia applications is transmitted, as shown in Fig. 2, data is divided into a plurality of portions, and the complete data must be transmitted as a plurality of data bursts. As a result, the preamble time and the guard time with respect to the time used for transmission of the actual data increases, and there is the possibility of an interrupting burst from another station occurring between the divided data bursts. Consequently, the data throughput deteriorates.

In order to extend the maximum time during which the data can be transmitted with one data burst, a precise frequency oscillator, and a complicated synchronization circuit or AGC must be used, which disadvantageously requires an expensive, large-sized apparatus.

#### SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a spread-spectrum communication method and apparatus having a high throughput.

It is another object of the present invention to provide a spread-spectrum communication method and apparatus adapted for performing large-amount data communication.

It is a further object of the present invention to

provide a spread-spectrum communication method and apparatus in which an adjustment period for receiving spread spectrum data is provided in a period for transmitting spread spectrum data.

5           It is a still further object of the present invention  
to provide a spread-spectrum communication method and  
apparatus which communicate an adjustment signal for  
adjusting reception of spread spectrum data in a plurality  
of divided data-communication periods.

10            Other objects of the present invention will be apparent  
from the embodiments described below, based on the attached  
drawings.

To this end, according to a first aspect of the present invention, the foregoing objects have been achieved through provision of a spread spectrum communication method comprising the steps of: dividing a communication period for spread spectrum data into a plurality of communication periods; and providing an adjustment period for receiving the spread spectrum data between one data-communication period and another data-communication period.

The spread spectrum communication method may further comprise the step of synchronizing a spread code in the adjustment period.

The spread spectrum communication method may further  
25 comprise the step of providing the adjustment period prior



to the plurality of data-communication periods.

The spread spectrum communication method may further comprise the step of holding the adjusted setting of the receiving end in the data-communication period.

5       The spread spectrum communication method may further comprise the step of holding gain in the data-communication period.

10       The spread spectrum communication method may further comprise the step of communicating code-division-multiplexed data in the data-communication period.

15       The spectrum communication method further comprising the step of providing the adjustment period prior to the plurality of data-communication periods, may still further comprise the steps of establishing the setting of a receiving end in the adjustment period prior to the plurality of data communication periods; and correcting the established setting in the adjustment period between one data-communication period and the next data-communication period.

20       Preferably, in the spread spectrum communication method further comprising the step of providing the adjustment period prior to the plurality of data-communication periods, the gain for the adjustment in the adjustment period prior to the plurality of data-communication periods is larger  
25       than the gain for the adjustment in the adjustment period

00561152 001300  
00561152 001300

Preferably, in the spread spectrum communication method further comprising the step of providing the adjustment period prior to the plurality of data-communication periods, an adjusting signal communicated in the adjustment period prior to the plurality of data-communication periods is longer than an adjusting signal communicated in the adjustment period between the one data-communication period and the next data-communication period.

According to a second aspect of the present invention, the foregoing objects have been achieved through provision of a spread spectrum communication apparatus comprising:

20 data communication means for communicating spread spectrum data in a plurality of divided data-communication periods; and adjustment-signal communication means for communicating an adjustment signal for adjusting reception of spread spectrum data between one data-communication period and

25 another communication period.

The spread spectrum communication apparatus may further comprise adjustment means for establishing the setting of a receiving end in accordance with the adjustment signal prior to the plurality of data-communication periods and  
5 correcting the established setting in accordance with the adjustment means between the one data-communication period and the next data-communication period.

The spread spectrum communication apparatus may further comprise holding means for holding the setting of the  
10 receiving end in the data-communication period.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a chart showing details of the format of a data burst according to the related art.

15 Fig. 2 is a chart showing a case where a large amount of data is transmitted in the related art.

Fig. 3 is a chart showing the format of a data burst according to a first embodiment of the present invention.

20 Figs. 4A and 4B are block diagrams showing a transmitting end in an embodiment of the present invention.

Figs. 5A and 5B are block diagrams showing a receiving end in an embodiment of the present invention.

25 Fig. 6 is a flowchart showing a case where a preamble is being received in the first embodiment of the present invention.

Fig. 7 is a flowchart showing a case where a mid-amble is being received in the first embodiment of the present invention.

5 Fig. 8 is a chart showing the format of data bursts in a second embodiment of the present invention.

Fig. 9 is a flowchart showing a case where a mid-amble is being received in the second embodiment of the present invention.

10 Fig. 10 is a chart showing the format of data bursts according to a third embodiment of the present invention.

Fig. 11 is a flowchart showing a case where a preamble is being received in the third embodiment of the present invention.

15 Fig. 12 is a flowchart showing a case where a mid-amble is being received in the third embodiment of the present invention.

Fig. 13 is a chart showing the format of data bursts according to a fourth embodiment of the present invention.

20 DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 3 shows the format of a data burst according to a first embodiment of a digital communication method of the present invention. For example, the data burst having a train-type data-burst structure includes a preamble (PR),  
25 data (DA) and one or a plurality of what will, hereinafter,

be termed "mid-amble" (MD). The preamble (PR) includes a synchronization code (SY), a unique word representing the start of received data, and a station-identification code (ID) showing which station the information is addressed to.

5 The mid-amble (MD) includes a synchronization code (SY).

The length of the data (DA) is equal to the maximum duration of data capable of being transmitted with one data burst, which is limited by a time during which synchronous precision or AGC precision in the related art can be  
10 maintained.

Figs. 4A, 4B, 5A and 5B show the diagrams of a transmitting end and a receiving end according to the first embodiment of the present invention. As shown in Fig. 4A, a data processor 41 in the transmitting end generates a data  
15 burst as shown in Fig. 3 in accordance with a command from an upper layer 40, and sends the data burst as a spread spectrum signal to a transmission line via a high-frequency processor 42. Information data (DA), a station-identification code (ID), a status indicator (ST) (shown in  
20 Fig. 10) and so forth are sent as data from the upper layer 40 into the data processor 41 shown in Fig. 4A. A timing generator 41A shown in Fig. 4B generates each predetermined timing involved in constructing the data burst. In accordance with the timing generated by the timing generator  
25 41A, an SS modulator 41E outputs the synchronization code

0955157-091300

(SY) without modulating it in the synchronization-code (SY) period. Also, in the unique-word (UW) period a selector 41D selects a transmission signal from a signal series "0101..." generated from a UW generator 41C in accordance with the timing generated by the timing generator 41A. The SS modulator 41E performs the spread modulation of the output of the selector 41D, and the modulated output is sent as a spread spectrum signal to the transmission line via the high-frequency processor 42. In the synchronization-code (SY) period the selector 41D operates so that the SS modulator 41E is not supplied with the signals from the upper layer 40 and the UW generator 41C.

At this time the timing generator 41A has control such that the synchronization code (SY) is output from the SS modulator 41E in the SY period, the unique word (UW) is output from the UW generator 41C in the unique-word (UW) period among the other periods, and the station-identification code (ID), the status (ST) and the data (DA) are output from the upper layer 40.

Figs. 6 and 7 show flowcharts of the operation of the receiving end when it has received the above-described data burst. Fig. 6 shows a condition in which the preamble (PR) is being received, while Fig. 7 shows a condition in which the mid-amble (MD) is being received.

When the receiving end, having received the spread-

5  
10  
15  
20  
25

of the AGC by the high-frequency processor 43 in step S32, fine phase adjustment of the clock signal by the synchronizer 44A in step S33, and so forth. An upper layer 45 informs the timing generator 44F whether the data has terminated or whether a following mid-amble has been received, in step S31. Since acquisition of the clock synchronization and the AGC has been established in the preamble (PR) period, the clock synchronization in the mid-amble (MD) period is sufficiently achieved by only phase correction, and the initial acquisition of the AGC is not needed. Accordingly, the synchronization code in the mid-amble (MD) period may be shorter than the synchronization code in preamble (PR) period. The high-frequency processor 43 increases the gain to cause the rapid acquisition of the AGC in step S13, and decreases the gain to perform fine adjustment of the AGC in step S16 or S32. After the lapse of a predetermined time, the timing generator 44F holds the AGC and the clock synchronization by the high-frequency processor 43 and the synchronization unit 44 in step S36, and causes an SS demodulator 44C to demodulate the data (DA) in step S215. The receiving end performs the above processes until the train terminates.

In this manner, according to the first embodiment, even when a large amount of digital data is sent, the data can be transmitted without separating it into a plurality of data



bursts. In this case the need for a plurality of conventionally required unique words (UW), station-identification codes (ID) and guard times (GT) is eliminated, and there is no possibility that interrupting bursts from another station occur. Consequently, improving the data throughput itself is realized.

Fig. 8 shows the format of a data burst according to a second embodiment of the present invention.

The data burst according to the second embodiment has a train-type data-burst structure including a preamble (PR), data (DA) and one or a plurality of mid-ambls (MD). The preamble (PR) includes a synchronization code (SY), a unique word (UW) and a station-identification code (ID). Each mid-  
amble includes a synchronization code (SY) and a unique word (UW).

The structure used with this format is identical to that shown in Figs. 4A, 4B, 5A and 5B.

Fig. 9 shows a flowchart of the operation of the receiving end in handling such a data burst, and in particular, the mid-amble (MD). The operation of the receiving end while receiving the preamble (PR) is identical to that shown in Fig. 6.

In a case where there are successive groups of data (DA), when the synchronization code (SY) of the mid-amble (MD) is received in step S31, the high-frequency processor

43 performs fine adjustment of AGC in step S32 and the synchronizer 44A performs fine phase adjustment of the clock signal and so forth in step S33. Here, since the acquisition of the clock synchronization and the AGC has been established in the preamble (PR) period, the clock synchronization in the mid-ambly (MD) period is sufficiently achieved by only phase correction, and the initial acquisition of the AGC is not necessary. Accordingly, the synchronization code in the mid-ambly (MD) period may be shorter than the synchronization code in the preamble (PR) period. While the AGC and the clock synchronization are being fine-adjusted in steps S32 and S33, the unique word (UW) is detected by the comparator 44E in steps S34A and S35A. When the mid-ambly is received, the timing generator 44F switches the selector 44G to the UW generator 44D. When the comparator 44E detects the unique word (UW), the timing generator 44F holds the AGC and the clock synchronization by the high-frequency processor 43 and the synchronization unit 44 in step S36, and causes the SS demodulator 44C to demodulate the data in step S215.

Therefore, even when a large amount of digital data is sent, the need for a plurality of conventionally required station-identification codes (ID) and guard times (GT) is eliminated, and there is no possibility that interrupting bursts from another station occur. Consequently, improving

the data throughput itself is realized.

Here, although inserting the unique word (UW) in the mid-amble (MD) slightly decreases the total throughput, it is effective in improving data-start detection precision after each mid-amble (MD).

Fig. 10 shows the format of a data burst according to a third embodiment of the present invention. For example, the data burst has a train type data-burst structure including data (DA) as information to be originally sent, a guard time (GT) provided before the start of sending in order to avoid conflict, a preamble (PR), and one or a plurality of mid-ambles (MD) in data transmission. The preamble (PR) includes a synchronization code (SY), a unique word (UW) as a signal series of "0101..." representing the start of received data, station-identification code (ID) showing which station the information is addressed to, and a status indicator (ST) as information about the length of the data, the type of data and the number of data groups included in one train (three groups of data in Fig. 10). The mid-amble (MD) includes a synchronization code (SY) and a unique word (UW).

The structure described in the third embodiment is identical to those shown in Figs. 4A, 4B, 5A and 5B.

The receiving end which received the data burst causes the data processor 44 to establish synchronization by means

of the high-frequency processor 43 shown in Fig. 5A and to demodulate the data. In the data processor 44, a demodulation clock signal with synchronization established in the synchronization code (SY) period is used to perform reverse spread demodulation in the SS demodulator 44C, and the comparator 44E compares the signal series of "0101..." generated from the UW generator 44D and the demodulated data. If the output data of the SS demodulator 44C coincides with the unique word (UW) from the UW generator 44D, the timing generator 44F generates each predetermined timing included in the data burst, and sends the information data (DA), the station-identification code (ID), the status (ST) and so forth to the upper layer 45.

Figs. 11 and 12 show flowcharts of the operation of the receiving end when processing the above-described data burst. In an initial condition the timing generator 44F sets the selector 44G to the UW generator 44D. When the data burst is received, in step S52 the AGC is acquired by the high-frequency processor 43 and the clock synchronization is established by the synchronizer 44A in accordance with the synchronization code. Successively, when the unique word (UW) is detected by the comparator 44E in step S53, the timing generator 44F performs setting so that in step S54 the high-frequency processor 43 and the synchronizer 44A hold the AGC and the clock synchronization.

09661452 091300  
002160 2511960

The timing generator 44F also sets the selector 44G to the ID generator 44B. In addition, when the comparator 44E detects that the station-identification code (ID) received in step S57 is addressed to the receiving end (i.e., to this particular receiver), the timing generator 44F recognizes the status input from the SS demodulator 44C in the subsequent step S58. The SS demodulator 44C demodulates the data in step S59, and performs setting so that the demodulated data is output to the upper layer 45 until it detects the end of the data in step S60.

The length and number of the groups of data (DA) are included in the status (ST) recognized in step S58. The timing generator 44F controls the reception sequence, based on them.

In addition, by sending the status (ST) to the upper layer 45, notification of the end of the data and the end of the train may be given from the upper layer 45.

If in step S61 the end of the train is not detected, or when a mid-amble (MD) and data group (DA) are received after reception of a preceding data group (DA), the previously established AGC and synchronization held in steps S52 and S54 are adjusted in step S71 in accordance with the synchronization code (SY) of the mid-amble (MD). When the unique word (UW) of the mid-amble (MD) is detected in step S72, the AGC, the synchronization and so forth are held in

step S73, the process returns to step S59. If the SS demodulator 44C detects the end of the train, the process returns to step S52. Also, if it is found in step S57 that the station-identification code (ID) detected by the SS demodulator 44C is not addressed to the receiving end, the process returns to step S52.

The acquisition of the clock synchronization and the AGC has been established in the preamble period. Thus, the clock synchronization in the mid-amble period is sufficiently achieved by only phase correction, and the need for the initial acquisition of the AGC is eliminated. Accordingly, the synchronization code (SY) in the mid-amble (MD) may be shorter than the synchronization code (SY) in the preamble (PR) period. The high-frequency processor 43 increases the gain in step S52 so that the AGC is rapidly acquired, and in step S71 the gain is reduced to precisely adjust the AGC. The synchronizer 44A increases the acquisition gain in step S52, and decreases it in step S71.

Fig. 13 shows the format of a data burst according to a fourth embodiment of the present invention.

The data burst shown in Fig. 13 includes a preamble (PR), data groups (DA) and one or a plurality of mid-ambles (MD). The preamble (PR) includes a synchronization code (SY), a unique word (UW), and a station-identification code (ID). The data (DA) is multiplexed by code division

multiplexing. Each mid-amble (MD) includes a synchronization code (SY). A CDM communication method, which is one spread-spectrum communication method used to improve data throughput, uses N mutually orthogonal codes to perform the frequency-axially spread multiplexing of data, and sends the multiplexed data.

According to the fourth embodiment, the SS modulator 41E has a structure as shown in Fig. 4B, and performs the code division multiplexing (CDM) of the data burst by using the spread-spectrum (SS) communication method.

In addition, the SS modulator 44C has a structure as shown in Fig. 5B, and uses N mutually orthogonal PN codes to perform the CDM reverse spreading of the code-division-multiplexed data. (The structures shown in SS modulators 41E and 44C are well known in themselves and need not be described; nonetheless, some details are noted below) Here, as shown in Fig. 10, by using a signal which is not multiplexed as a code in the preamble and the mid-amble, power consumed by the preamble and the mid-amble can be increased N times power per data channel, which means that synchronization establishing and AGC inputting, need not be greatly affected by a change in the communication quality of the transmission line.

Other operations of the receiving end may be performed by the processes shown in Figs. 6, 7, 9, 11 and 12.

When a code-synchronous CDM communication method is used in the SS modulator 44E, the spread spectrum modulation and multiplexing (CDM) of the selector 41E output is performed using N mutually orthogonal PN (pseudo-noise) codes. In this case the modulator 41E selects a synchronization code  $PN_0$  from spread codes  $PN_0$  to  $PN_n$ , and outputs it as an SY code to the high-frequency processor 42, without performing the code division multiplexing of it.

The code-synchronous CDM communication method is a spread-spectrum communication method used to improve the data throughput, which uses N mutually orthogonal codes to perform the spread multiplexing of data onto a frequency, and sends the multiplexed data. When the data or the like formed by the CDM is received and demodulated, gain and synchronization are held by the receiving end.

The station-identification code (ID), the status (ST) and the unique word (UW) other than information data are transmitted using one spread code.

In the foregoing, although the present invention has been described based on the preferred embodiments thereof, the present invention is not limited to the structures of those embodiments but may be modified within the appended claims.



WHAT IS CLAIMED IS:

1. A spread spectrum communication method comprising the steps of:

dividing a communication period for spread spectrum data into a plurality of communication periods; and providing an adjustment period for receiving the spread spectrum data between one data-communication period and another data-communication period.

2. A spread spectrum communication method according to Claim 1, further comprising the step of synchronizing a spread code in the adjustment period.

3. A spread spectrum communication method according to Claim 1, further comprising the step of providing a first adjustment period prior to the plurality of data-communication periods.

4. A spread spectrum communication method according to Claim 3, further comprising the steps of establishing the setting of a receiving end in the first adjustment period prior to the plurality of data communication periods; and correcting the established setting in the first adjustment period, between the one data-communication period

and the other data-communication period.

5. A spread spectrum communication method according to Claim 1, further comprising the step of holding the adjusted setting of a receiving end in the data-communication period.

6. A spread spectrum communication method according to Claim 1, further comprising the step of adjusting gain in the adjustment period.

7. A spread spectrum communication method according to Claim 1, further comprising the step of communicating code-division-multiplexed data in the data-communication period.

8. A spread spectrum communication method according to Claim 7, further comprising the step of communicating a signal not multiplexed by code division multiplexing, in the adjustment period.

9. A spread spectrum communication method according to Claim 3, wherein gain for the adjustment in the first adjustment period prior to the plurality of data-communication periods is larger than gain for the adjustment in the adjustment period between the one data-communication period and the other data-communication period.





18. A spread spectrum communication apparatus according to Claim 17, wherein said adjustment-signal communication means communicates an adjustment signal not multiplexed by code division multiplexing.

19. A spread spectrum communication apparatus according to Claim 13, wherein gain caused by adjustment in accordance with the first adjustment signal prior to the plurality of data-communication periods is larger than gain caused by adjustment in accordance with the adjustment signal between the one data-communication period and the other data-communication period.

20. A spread spectrum communication apparatus according to Claim 13, wherein the first adjustment signal prior to the plurality of data-communication periods is longer than the adjustment signal between the one data-communication period and the other data-communication period.

21. A spread spectrum communication method comprising the steps of:

dividing data into a plurality of groups of data;  
transmitting the groups of data one after another to a

receiving end; and

transmitting, between each two successive groups of data, information to be used by the receiving end in processing an immediately-following one of the groups of data.

00661152-091300  
0066160-251690

[illegible]

000000000000

FIG. 1




FIG. 2








FIG. 4A

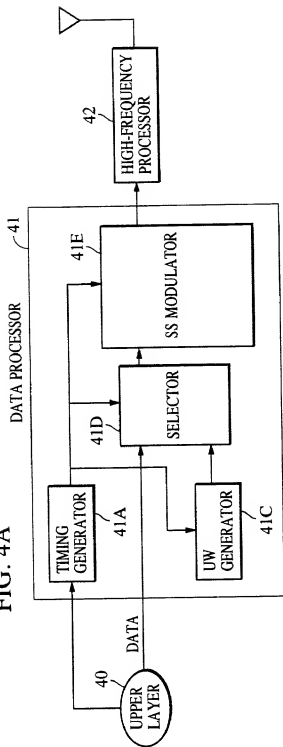


FIG. 4B

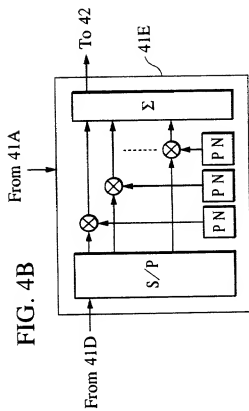


FIG. 5A

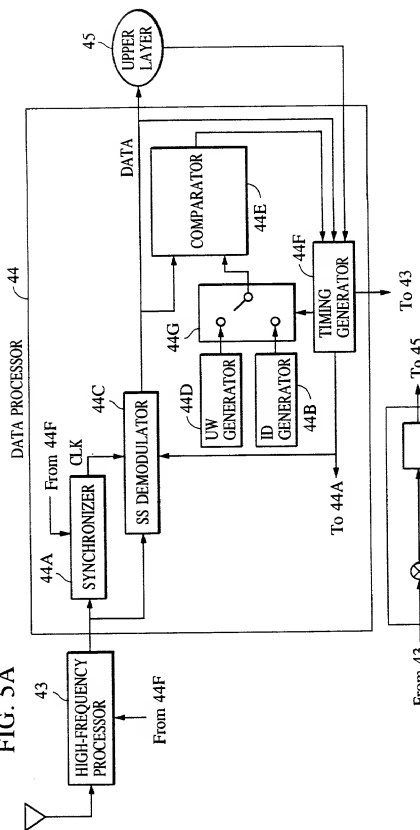


FIG. 5B

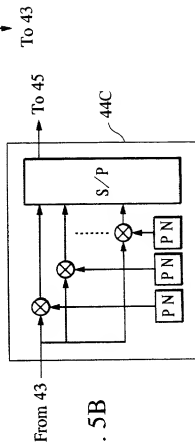


FIG. 6

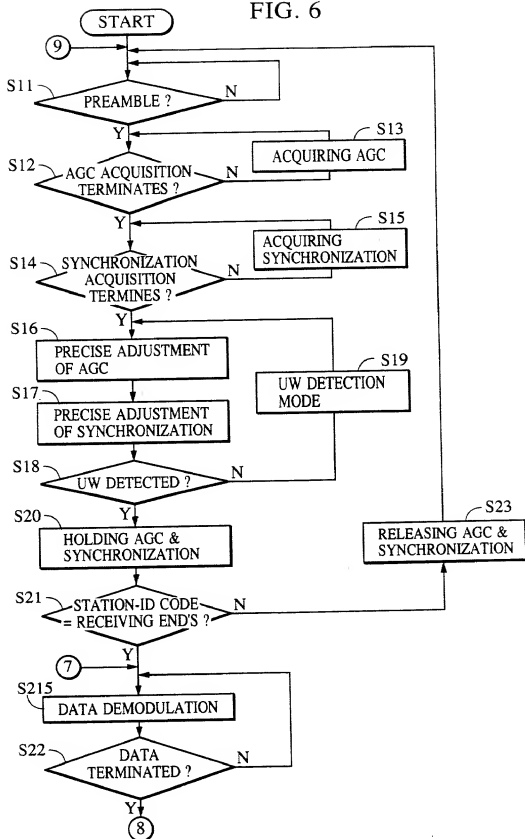


FIG. 8




FIG. 7


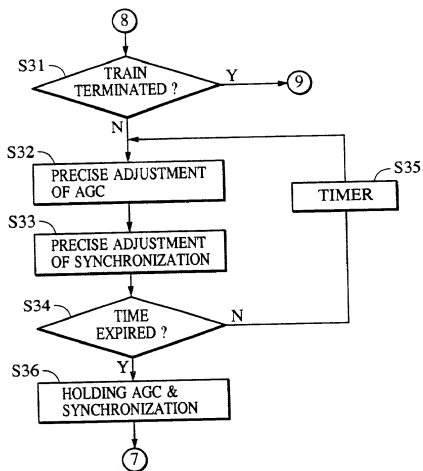


FIG. 9

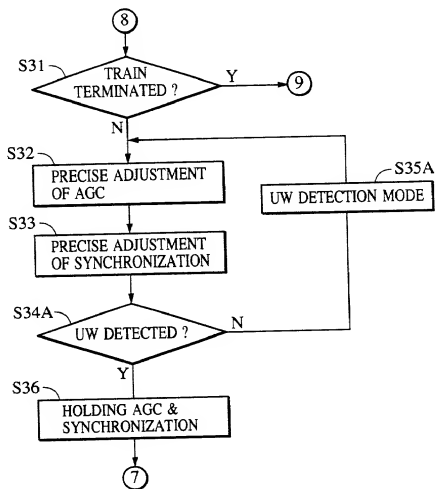

00561457 091300

FIG. 10







FIG. 11

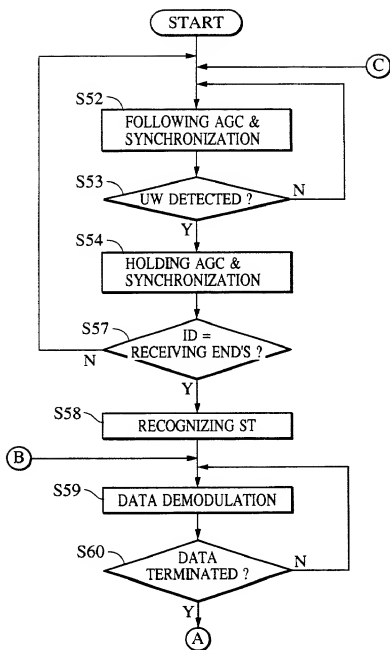

00661452 001700  
002160 2511560

FIG. 12


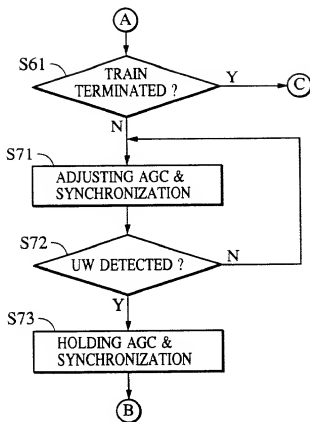


FIG. 13



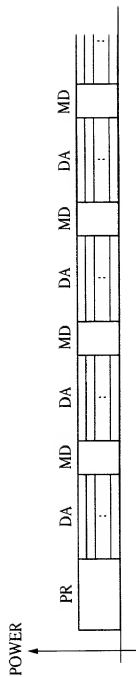

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

(Page 2)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Rie Suzuki  
Inventor's signature Rie Suzuki  
Date November 14, 1997 Citizen/Subject of Japan  
Residence 243-121, Setogayacho, Hodogaya-ku, Yokohama-shi,  
Kanagawa-ken, Japan  
Post Office Address c/o CANON KABUSHIKI KAISHA  
3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan

Full Name of Second Joint Inventor, if any \_\_\_\_\_  
Second Inventor's signature \_\_\_\_\_  
Date \_\_\_\_\_ Citizen/Subject of \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full Name of Third Joint Inventor, if any \_\_\_\_\_  
Third Inventor's signature \_\_\_\_\_  
Date \_\_\_\_\_ Citizen/Subject of \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full Name of Fourth Joint Inventor, if any \_\_\_\_\_  
Fourth Inventor's signature \_\_\_\_\_  
Date \_\_\_\_\_ Citizen/Subject of \_\_\_\_\_  
Residence \_\_\_\_\_  
Post Office Address \_\_\_\_\_